


BOTTOM DUMP





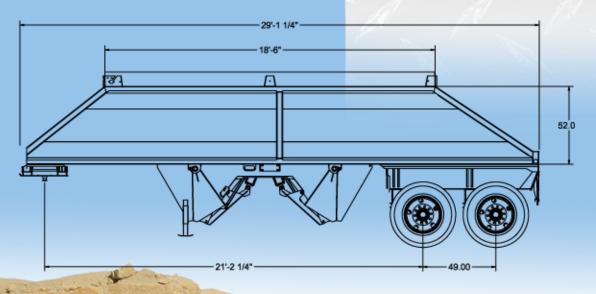

BETTER PAYLOAD
INDUSTRY LEADING DESIGN
STRUCTURAL INTEGRITY



STANDARD FEATURES

BODY

Side Height: 52"

Side Material: 10ga AR200 Oscillating Upper Fifth Wheel

HOPPER & GATES

Gate Material: 10ga Hopper Opening: Top 88" x 222" Gate Opening: 19" each gate Gate Clearance: 14"

Gate Clearance: 14"

Air Operated Gates: 6" Composite Air Cylinders

Adjustable Gate Settings

Suspension

Reyco 21B - 8 Leaf (49"/60"/72" Spread) Valves in Aluminum Box

AXLES

22,500 lbs

BRAKES

Auto Slacks Haldex ABS (2S1M)

LIGHTING

Truck Lite Harness, common internal ground

PAINT

Endura (high performance industrial coating) Accent Striping, double 1" tape

TIRES

General 11R22.5 "General Grabber OA"

WHEELS


Steel, Unimount


OPTIONS

58" Side Height Haldex ABS 4S2M / 6S3M LED Lighting 2 Speed Landing Gear Ridewell 240 Suspension Turner HT 230 Suspension Turner HT 300 Suspension Push Block Boards (Extensions) Shed Plates Axle Guards Flap Packages Various Tires/Rims Michel's Tarp System (Electric/Manual) 100% Conspicuity Tape 5" Striping Package

Models Available


29' & 32' Tandems 40' & 42' Triaxles B-Trains





The cross gates may be operated individually or simultaneously.











Cylinders provide better load "pinch off" due to enhanced mechanical advantage of opener/closer mechanism

Multi-position gate adjustment brackets make gate adjustment a very simple matter and are easily accessible to the operator.

We also manufacture:
WAGONS / END DUMPS
PUP TRAILERS / SIDE DUMPS



Box 249 - 36 Main Street (PR #205) Rosenort, Manitoba CANADA ROG 1W0

Phone: 204.746.2348 Fax: 204.746.2286 improvements, Midland Manufacturing reserves the right to make changes at any time to products described and/or illustrated herein without notice or liability.

The information, illustrations and specifications provided in this brochure are based on

our latest product information at time of publication. To ensure continuous product

Sold by: